



AP1152ADUXX

14.5V Input / 300mA Output LDO Regulator

1. General Description

The AP1152ADUxx is a low dropout linear regulator with ON/OFF control, which can supply 300mA load current. The IC is an integrated circuit with a silicon monolithic bipolar structure. The output voltage, trimmed with high accuracy, is available from 1.3 to 9.5V in 0.1V steps. The output capacitor is available to use a small 0.1uF ceramic capacitor ($2.5V \leq V_{out}$). The over current, thermal and reverse bias protections are integrated, and also the package is small and high power dissipation type. The IC is designed for space saving requirements.

2. Feature

- Available to use a small 0.1uF ceramic capacitor
- Dropout Voltage 105mV at 100mA
- Output Current 300mA Peak 480mA
- High Precision output voltage $\pm 1.5\%$ or $\pm 50mV$
- High ripple rejection ratio 80dB at 1kHz
- Wide operating voltage range 2.1V to 14.5V
- Very low quiescent current $65\mu A$ at $I_{OUT}=0mA$
- On/Off control (High active)
- Built-in Short circuit protection, thermal shutdown
- Built-in reverse bias over current protection
- Available very low noise application
- Very small surface mount package SOT89-5

3. Application

- Any Electronic Equipment
- Battery Powered Systems
- Mobile Communication

| |
|-----------------------------|
| 4. Table of Contents |
|-----------------------------|

| | |
|--|----|
| 1. General Description | 1 |
| 2. Feature..... | 1 |
| 3. Application..... | 1 |
| 4. Table of Contents..... | 2 |
| 5. Block Diagram | 3 |
| 6. Ordering Information | 4 |
| 7. Pin Configurations | 5 |
| ■ Pin Configurations..... | 5 |
| ■ Functions | 5 |
| 8. Absolute Maximum Ratings | 6 |
| 9. Recommended Operating Conditions | 6 |
| 10. Electrical Characteristics..... | 7 |
| ■ Electrical Characteristics of Ta=Tj=25°C | 7 |
| ■ Electrical Characteristics of Ta=-40°C~85°C..... | 10 |
| 11. Description | 13 |
| 11.1 Input / output capacitors | 13 |
| 11.2 Output noise | 14 |
| 11.3 Ripple Rejection | 15 |
| 11.4 DC Characteristics..... | 16 |
| 11.5 Temperature Characteristics | 18 |
| 11.6 On/Off Control | 20 |
| 11.7 PCB Layout | 21 |
| 12. Definition of term..... | 22 |
| 13. Recommended External Circuits..... | 23 |
| ■ External Circuit | 23 |
| 14. Package | 24 |
| ■ Outline Dimensions | 24 |
| 15. Revise History | 25 |
| IMPORTANT NOTICE..... | 26 |

5. Block Diagram

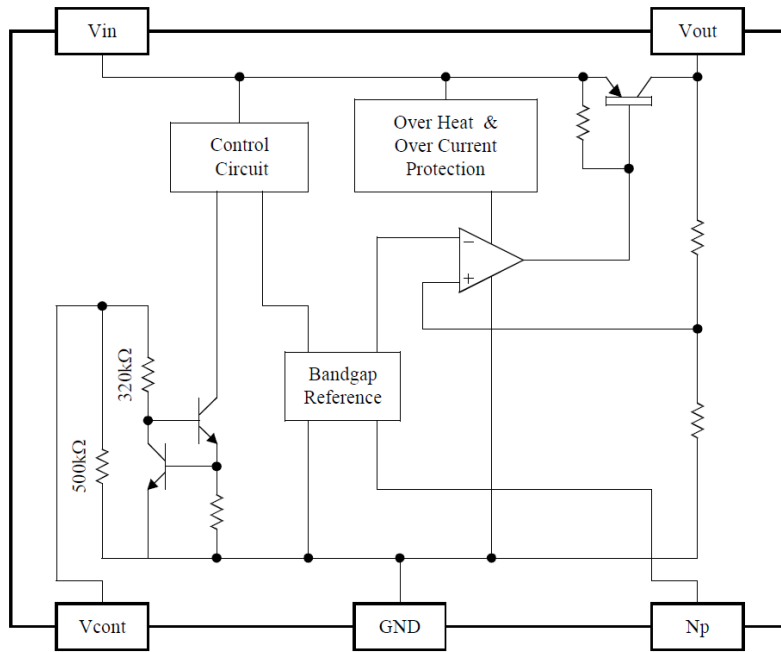


Figure 1. Block Diagram

| |
|--------------------------------|
| 6. Ordering Information |
|--------------------------------|

AP1152ADUXX -40 to 85°C SOT89-5

• Output Voltage Code

For product name, please check the below chart. Please contact your authorized ASAHI KASEI MICRODEVICES representative for voltage availability.

AP1152ADUXX
└─── Output voltage code

Table 1. Standard Voltage Version, Output Voltage & Voltage Code


| XX | V _{OUT} | XX | V _{OUT} | XX | V _{OUT} |
|----|------------------|----|------------------|----|------------------|
| 18 | 1.8 | 30 | 3.0 | 45 | 4.5 |
| 25 | 2.5 | 33 | 3.3 | 50 | 5.0 |
| 28 | 2.8 | 40 | 4.0 | - | - |

Table 2. Optional Voltage Version, Output Voltage & Voltage Code

| XX | V _{OUT} | XX | V _{OUT} | XX | V _{OUT} | XX | V _{OUT} |
|----|------------------|----|------------------|----|------------------|----|------------------|
| 13 | 1.3 | 26 | 2.6 | 41 | 4.1 | 54 | 5.4 |
| 14 | 1.4 | 27 | 2.7 | 42 | 4.2 | 5E | 5.45 |
| 15 | 1.5 | 29 | 2.9 | 43 | 4.3 | 55 | 5.5 |
| 16 | 1.6 | 31 | 3.1 | 44 | 4.4 | 60 | 6.0 |
| 17 | 1.7 | 32 | 3.2 | 46 | 4.6 | 65 | 6.5 |
| 19 | 1.9 | 34 | 3.4 | 47 | 4.7 | 70 | 7.0 |
| 20 | 2.0 | 35 | 3.5 | 48 | 4.8 | 75 | 7.5 |
| 21 | 2.1 | 36 | 3.6 | 49 | 4.9 | 80 | 8.0 |
| 22 | 2.2 | 37 | 3.7 | 51 | 5.1 | 85 | 8.5 |
| 23 | 2.3 | 38 | 3.8 | 52 | 5.2 | 90 | 9.0 |
| 24 | 2.4 | 39 | 3.9 | 53 | 5.3 | 95 | 9.5 |

7. Pin Configurations

■ Pin Configurations

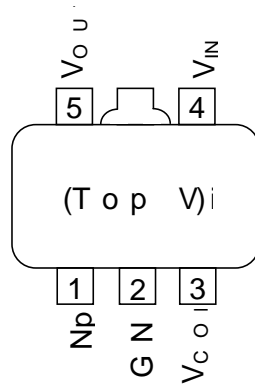

■ Functions

| Pin No. | Pin Description | Internal Equivalent Circuit | Description |
|---------|-------------------|-----------------------------|---|
| 1 | Np | | <p>Noise Bypass Terminal</p> <p>Connect a bypass capacitor between GND.</p> |
| 2 | GND | | GND Terminal |
| 3 | V _{CONT} | | <p>On/Off Control Terminal</p> <p>The pull-down resistor (500kΩ) is built-in.</p> |
| 4 | V _{IN} | | Input Terminal |
| 5 | V _{OUT} | | Output Terminal |

8. Absolute Maximum Ratings

| Parameter | Symbol | min | max | Unit | Condition |
|---------------------------|------------------|------|-----|------|---------------------|
| Supply Voltage | $V_{CC_{MAX}}$ | -0.4 | 16 | V | |
| Reverse Bias | $V_{rev_{MAX}}$ | -0.4 | 6 | V | $V_{out} \leq 2.0V$ |
| | | -0.4 | 12 | V | $2.1V \leq V_{out}$ |
| Np Terminal Voltage | $V_{np_{MAX}}$ | -0.4 | 5 | V | |
| Vcont Terminal Voltage | $V_{cont_{MAX}}$ | -0.4 | 16 | V | |
| Junction Temperature | T_j | - | 150 | °C | |
| Storage Temperature Range | T_{stg} | -55 | 150 | °C | |
| Power Dissipation | P_D | - | 900 | mW | (Note 1) |

Note 1. Please do derating with $7.2mW/°C$ at $P_d=900mW$ and $25°C$ or more. Thermal resistance (θ_{JA}) = $138°C/W$.

WARNING: The maximum ratings are the absolute limitation values with the possibility of the IC breakage. When the operation exceeds this standard quality cannot be guaranteed.

9. Recommended Operating Conditions

| Parameter | Symbol | min | typ | max | Unit | Condition |
|-----------------------------|----------|-----|-----|------|------|-----------|
| Operating Temperature Range | T_a | -40 | - | 85 | °C | |
| Operating Voltage Range | V_{OP} | 2.1 | - | 14.5 | V | |

10. Electrical Characteristics

■ Electrical Characteristics of Ta=Tj=25°C

The parameters with min or max values will be guaranteed at Ta=Tj=25°C.

(V_{IN}=V_{out}(typ)+1V, V_{cont}=1.8V, Ta=Tj=25°C)

| Parameter | Symbol | Condition | min | typ | max | Unit |
|------------------------------------|----------------------|--|--------------------|-----|------|------|
| Output Voltage | V _{out} | I _{out} = 5mA | (Table 3, Table 4) | | | V |
| Line Regulation | LinReg | ΔV _{IN} = 5V | - | 0.0 | 6.0 | mV |
| Load Regulation | LoaReg | I _{out} = 5mA ~ 100mA | (Table 3, Table 4) | | | mV |
| | | I _{out} = 5mA ~ 200mA | | | | |
| | | I _{out} = 5mA ~ 300mA | | | | |
| Dropout Voltage (Note 2) | V _{drop} | I _{out} = 100mA | - | 105 | 170 | mV |
| | | I _{out} = 200mA | - | 170 | 270 | |
| | | I _{out} = 270mA (2.1V ≤ V _{out} ≤ 2.3V) | - | 235 | 370 | |
| | | I _{out} = 300mA (2.4V ≤ V _{out}) | - | 235 | 370 | |
| Maximum Output Current (Note 3) | I _{out} MAX | V _{out} = V _{out} (typ) × 0.9 | 380 | 480 | - | mA |
| Short Circuit Current (Note 3) | I _{SHORT} | | - | 500 | - | mA |
| Quiescent Current | I _q | I _{out} = 0mA | - | 65 | 90 | μA |
| Standby Current | I _{standby} | V _{cont} = 0V | - | 0.0 | 0.1 | μA |
| Ground Terminal Current | I _{gnd} | I _{out} = 100mA | - | 1.8 | 3.0 | mA |
| V _{cont} Terminal | | | | | | |
| V _{cont} Terminal Current | I _{cont} | V _{cont} = 1.8V | - | 5.0 | 10.0 | μA |
| V _{cont} Terminal Voltage | V _{cont} | V _{out} ON state | 1.8 | - | - | V |
| | | V _{out} OFF state | - | - | 0.35 | V |

Note 2. For V_{out} ≤ 2.0V, no regulations.

Note 3. The maximum output current is limited by power dissipation.

Table 3. Standard Voltage Version

| Part Number | Output Voltage | | | Load Regulation | | | | | |
|-------------|----------------|-------|-------|-----------------|-----|--------------|-----|--------------|-----|
| | | | | Iout = 100mA | | Iout = 200mA | | Iout = 300mA | |
| | min | typ | max | typ | max | typ | max | typ | max |
| V | V | V | mV | mV | mV | mV | mV | mV | mV |
| AP1152ADU18 | 1.750 | 1.800 | 1.850 | 11 | 25 | 23 | 51 | 36 | 83 |
| AP1152ADU25 | 2.450 | 2.500 | 2.550 | 12 | 27 | 24 | 55 | 40 | 91 |
| AP1152ADU28 | 2.750 | 2.800 | 2.850 | 12 | 27 | 25 | 57 | 41 | 95 |
| AP1152ADU30 | 2.950 | 3.000 | 3.050 | 12 | 28 | 26 | 58 | 42 | 97 |
| AP1152ADU33 | 3.250 | 3.300 | 3.350 | 13 | 28 | 26 | 60 | 44 | 101 |
| AP1152ADU40 | 3.940 | 4.000 | 4.060 | 13 | 30 | 28 | 64 | 48 | 109 |
| AP1152ADU45 | 4.432 | 4.500 | 4.568 | 14 | 31 | 29 | 67 | 50 | 115 |
| AP1152ADU50 | 4.925 | 5.000 | 5.075 | 14 | 32 | 31 | 70 | 53 | 121 |

Table 4. Optional Voltage Version

| Part Number | Output Voltage | | | Load Regulation | | | | | |
|-------------|----------------|-------|-------|-----------------|-----|--------------|-----|--------------|-----|
| | | | | Iout = 100mA | | Iout = 200mA | | Iout = 300mA | |
| | min | typ | max | typ | max | typ | max | typ | max |
| | V | V | V | mV | mV | mV | mV | mV | mV |
| AP1152ADU13 | 1.250 | 1.300 | 1.350 | 11 | 24 | 21 | 49 | 34 | 77 |
| AP1152ADU14 | 1.350 | 1.400 | 1.450 | 11 | 24 | 22 | 49 | 34 | 78 |
| AP1152ADU15 | 1.450 | 1.500 | 1.550 | 11 | 24 | 22 | 50 | 35 | 79 |
| AP1152ADU16 | 1.550 | 1.600 | 1.650 | 11 | 24 | 22 | 50 | 35 | 80 |
| AP1152ADU17 | 1.650 | 1.700 | 1.750 | 11 | 25 | 22 | 51 | 36 | 82 |
| AP1152ADU19 | 1.850 | 1.900 | 1.950 | 11 | 25 | 23 | 52 | 37 | 84 |
| AP1152ADU20 | 1.950 | 2.000 | 2.050 | 11 | 25 | 23 | 53 | 37 | 85 |
| AP1152ADU21 | 2.050 | 2.100 | 2.150 | 11 | 26 | 23 | 53 | 38 | 86 |
| AP1152ADU22 | 2.150 | 2.200 | 2.250 | 12 | 26 | 24 | 54 | 38 | 88 |
| AP1152ADU23 | 2.250 | 2.300 | 2.350 | 12 | 26 | 24 | 54 | 39 | 89 |
| AP1152ADU24 | 2.350 | 2.400 | 2.450 | 12 | 26 | 24 | 55 | 39 | 90 |
| AP1152ADU26 | 2.550 | 2.600 | 2.650 | 12 | 27 | 25 | 56 | 40 | 92 |
| AP1152ADU27 | 2.650 | 2.700 | 2.750 | 12 | 27 | 25 | 56 | 41 | 93 |
| AP1152ADU29 | 2.850 | 2.900 | 2.950 | 12 | 27 | 25 | 58 | 42 | 96 |
| AP1152ADU31 | 3.050 | 3.100 | 3.150 | 12 | 28 | 26 | 59 | 43 | 98 |
| AP1152ADU32 | 3.150 | 3.200 | 3.250 | 12 | 28 | 26 | 59 | 44 | 99 |
| AP1152ADU34 | 3.349 | 3.400 | 3.451 | 13 | 29 | 27 | 60 | 45 | 102 |
| AP1152ADU35 | 3.447 | 3.500 | 3.553 | 13 | 29 | 27 | 61 | 45 | 103 |
| AP1152ADU36 | 3.546 | 3.600 | 3.654 | 13 | 29 | 27 | 62 | 46 | 104 |
| AP1152ADU37 | 3.644 | 3.700 | 3.756 | 13 | 29 | 27 | 62 | 46 | 105 |
| AP1152ADU38 | 3.743 | 3.800 | 3.857 | 13 | 29 | 28 | 63 | 47 | 107 |
| AP1152ADU39 | 3.841 | 3.900 | 3.959 | 13 | 30 | 28 | 63 | 47 | 108 |
| AP1152ADU41 | 4.038 | 4.100 | 4.162 | 13 | 30 | 28 | 64 | 48 | 110 |
| AP1152ADU42 | 4.137 | 4.200 | 4.263 | 13 | 30 | 29 | 65 | 49 | 111 |
| AP1152ADU43 | 4.235 | 4.300 | 4.365 | 14 | 31 | 29 | 66 | 49 | 112 |
| AP1152ADU44 | 4.334 | 4.400 | 4.466 | 14 | 31 | 29 | 66 | 50 | 114 |
| AP1152ADU46 | 4.531 | 4.600 | 4.669 | 14 | 31 | 30 | 67 | 51 | 116 |
| AP1152ADU47 | 4.629 | 4.700 | 4.771 | 14 | 31 | 30 | 68 | 51 | 117 |
| AP1152ADU48 | 4.728 | 4.800 | 4.872 | 14 | 32 | 30 | 68 | 52 | 118 |
| AP1152ADU49 | 4.826 | 4.900 | 4.974 | 14 | 32 | 30 | 69 | 52 | 120 |
| AP1152ADU51 | 5.023 | 5.100 | 5.177 | 14 | 32 | 31 | 70 | 53 | 122 |
| AP1152ADU52 | 5.122 | 5.200 | 5.278 | 14 | 33 | 31 | 71 | 54 | 123 |
| AP1152ADU53 | 5.220 | 5.300 | 5.380 | 15 | 33 | 31 | 71 | 54 | 124 |
| AP1152ADU54 | 5.319 | 5.400 | 5.481 | 15 | 33 | 32 | 72 | 55 | 125 |
| AP1152ADU5E | 5.368 | 5.450 | 5.532 | 15 | 33 | 32 | 72 | 55 | 127 |
| AP1152ADU55 | 5.417 | 5.500 | 5.583 | 15 | 33 | 32 | 72 | 55 | 127 |
| AP1152ADU60 | 5.910 | 6.000 | 6.090 | 15 | 34 | 33 | 75 | 58 | 133 |
| AP1152ADU65 | 6.402 | 6.500 | 6.598 | 16 | 36 | 34 | 78 | 61 | 139 |
| AP1152ADU70 | 6.895 | 7.000 | 7.105 | 16 | 37 | 35 | 81 | 63 | 144 |
| AP1152ADU75 | 7.387 | 7.500 | 7.613 | 17 | 38 | 37 | 84 | 66 | 150 |
| AP1152ADU80 | 7.880 | 8.000 | 8.120 | 17 | 39 | 38 | 87 | 68 | 156 |
| AP1152ADU85 | 8.372 | 8.500 | 8.628 | 18 | 40 | 39 | 89 | 71 | 162 |
| AP1152ADU90 | 8.865 | 9.000 | 9.135 | 18 | 41 | 40 | 92 | 73 | 168 |
| AP1152ADU95 | 9.357 | 9.500 | 9.643 | 19 | 42 | 42 | 95 | 76 | 174 |

■ Electrical Characteristics of Ta=-40°C~85°C

The parameters with min or max values will be guaranteed at Ta=-40 ~ 85°C.

(V_{IN}=V_{out}(typ)+1V, V_{cont}=1.8V, Ta=-40~85°C)

| Parameter | Symbol | Condition | min | typ | max | Unit |
|------------------------------------|----------------------|---|--------------------|-----|------|------|
| Output Voltage | V _{out} | I _{out} = 5mA | (Table 5, Table 6) | | | V |
| Line Regulation | LinReg | ΔV _{IN} = 5V | - | 0.0 | 8.0 | mV |
| Load Regulation | LoaReg | I _{out} = 5mA ~ 100mA | (Table 5, Table 6) | | | mV |
| | | I _{out} = 5mA ~ 200mA | | | | |
| | | I _{out} = 5mA ~ 300mA | | | | |
| Dropout Voltage (Note 4) | V _{drop} | I _{out} = 100mA (2.2V ≤ V _{out}) | - | 105 | 200 | mV |
| | | I _{out} = 200mA (2.2V ≤ V _{out}) | - | 170 | 320 | |
| | | I _{out} = 300mA (2.4V ≤ V _{out}) | - | 235 | 440 | |
| Maximum Output Current (Note 5) | I _{out} MAX | V _{out} =V _{out} (typ)×0.9 | 340 | 480 | - | mA |
| Short Circuit Current (Note 5) | I _{SHORT} | | - | 500 | - | mA |
| Quiescent Current | I _q | I _{out} = 0mA | - | 65 | 100 | μA |
| Standby Current | I _{standby} | V _{cont} = 0V | - | 0.0 | 0.5 | μA |
| Ground Terminal Current | I _{gnd} | I _{out} = 100mA | - | 1.8 | 3.6 | mA |
| V _{cont} Terminal | | | | | | |
| V _{cont} Terminal Current | I _{cont} | V _{cont} = 1.8V | - | 5.0 | 12.0 | μA |
| V _{cont} Terminal Voltage | V _{cont} | V _{out} ON state | 1.8 | - | - | V |
| | | V _{out} OFF state | - | - | 0.35 | V |

Note 4. For V_{out} ≤ 2.1V, no regulations.

Note 5. The maximum output current is limited by power dissipation.

Table 5. Standard Voltage Version

| Part Number | Output Voltage | | | Load Regulation | | | | | |
|-------------|----------------|-------|-------|-----------------|-----|--------------|-----|--------------|-----|
| | | | | Iout = 100mA | | Iout = 200mA | | Iout = 300mA | |
| | min | typ | max | typ | max | typ | max | typ | max |
| V | V | V | mV | mV | mV | mV | mV | mV | |
| AP1152ADU18 | 1.720 | 1.800 | 1.880 | 11 | 30 | 23 | 63 | 36 | 118 |
| AP1152ADU25 | 2.420 | 2.500 | 2.580 | 12 | 31 | 24 | 68 | 40 | 131 |
| AP1152ADU28 | 2.720 | 2.800 | 2.880 | 12 | 32 | 25 | 70 | 41 | 137 |
| AP1152ADU30 | 2.920 | 3.000 | 3.080 | 12 | 33 | 26 | 72 | 42 | 141 |
| AP1152ADU33 | 3.217 | 3.300 | 3.383 | 13 | 33 | 26 | 74 | 44 | 147 |
| AP1152ADU40 | 3.900 | 4.000 | 4.100 | 13 | 35 | 28 | 79 | 48 | 161 |
| AP1152ADU45 | 4.387 | 4.500 | 4.613 | 14 | 36 | 29 | 82 | 50 | 170 |
| AP1152ADU50 | 4.875 | 5.000 | 5.125 | 14 | 37 | 31 | 86 | 53 | 180 |

Table 6. Optional Voltage Version


| Part Number | Output Voltage | | | Load Regulation | | | | | |
|-------------|----------------|-------|-------|-----------------|-----|--------------|-----|--------------|-----|
| | | | | Iout = 100mA | | Iout = 200mA | | Iout = 300mA | |
| | min | typ | max | typ | max | typ | max | typ | max |
| V | V | V | mV | mV | mV | mV | mV | mV | |
| AP1152ADU13 | 1.220 | 1.300 | 1.380 | 11 | 29 | 21 | 60 | 34 | 95 |
| AP1152ADU14 | 1.320 | 1.400 | 1.480 | 11 | 29 | 22 | 61 | 34 | 96 |
| AP1152ADU15 | 1.420 | 1.500 | 1.580 | 11 | 29 | 22 | 61 | 35 | 97 |
| AP1152ADU16 | 1.520 | 1.600 | 1.680 | 11 | 29 | 22 | 62 | 35 | 98 |
| AP1152ADU17 | 1.620 | 1.700 | 1.780 | 11 | 30 | 22 | 63 | 36 | 100 |
| AP1152ADU19 | 1.820 | 1.900 | 1.980 | 11 | 30 | 23 | 64 | 37 | 120 |
| AP1152ADU20 | 1.920 | 2.000 | 2.080 | 11 | 30 | 23 | 65 | 37 | 122 |
| AP1152ADU21 | 2.020 | 2.100 | 2.180 | 11 | 31 | 23 | 65 | 38 | 124 |
| AP1152ADU22 | 2.120 | 2.200 | 2.280 | 12 | 31 | 24 | 66 | 38 | 126 |
| AP1152ADU23 | 2.220 | 2.300 | 2.380 | 12 | 31 | 24 | 67 | 39 | 127 |
| AP1152ADU24 | 2.320 | 2.400 | 2.480 | 12 | 31 | 24 | 68 | 39 | 129 |
| AP1152ADU26 | 2.520 | 2.600 | 2.680 | 12 | 32 | 25 | 69 | 40 | 133 |
| AP1152ADU27 | 2.620 | 2.700 | 2.780 | 12 | 32 | 25 | 70 | 41 | 135 |
| AP1152ADU29 | 2.820 | 2.900 | 2.980 | 12 | 32 | 25 | 71 | 42 | 139 |
| AP1152ADU31 | 3.020 | 3.100 | 3.180 | 12 | 33 | 26 | 73 | 43 | 143 |
| AP1152ADU32 | 3.120 | 3.200 | 3.280 | 12 | 33 | 26 | 73 | 44 | 145 |
| AP1152ADU34 | 3.315 | 3.400 | 3.485 | 13 | 33 | 27 | 75 | 45 | 149 |
| AP1152ADU35 | 3.412 | 3.500 | 3.588 | 13 | 34 | 27 | 75 | 45 | 151 |
| AP1152ADU36 | 3.510 | 3.600 | 3.690 | 13 | 34 | 27 | 76 | 46 | 153 |
| AP1152ADU37 | 3.607 | 3.700 | 3.793 | 13 | 34 | 27 | 77 | 46 | 155 |
| AP1152ADU38 | 3.705 | 3.800 | 3.895 | 13 | 34 | 28 | 77 | 47 | 157 |
| AP1152ADU39 | 3.802 | 3.900 | 3.998 | 13 | 34 | 28 | 78 | 47 | 159 |
| AP1152ADU41 | 3.997 | 4.100 | 4.203 | 13 | 35 | 28 | 80 | 48 | 162 |
| AP1152ADU42 | 4.095 | 4.200 | 4.305 | 13 | 35 | 29 | 80 | 49 | 164 |
| AP1152ADU43 | 4.192 | 4.300 | 4.408 | 14 | 35 | 29 | 81 | 49 | 166 |
| AP1152ADU44 | 4.290 | 4.400 | 4.510 | 14 | 36 | 29 | 82 | 50 | 168 |
| AP1152ADU46 | 4.485 | 4.600 | 4.715 | 14 | 36 | 30 | 83 | 51 | 172 |
| AP1152ADU47 | 4.582 | 4.700 | 4.818 | 14 | 36 | 30 | 84 | 51 | 174 |
| AP1152ADU48 | 4.680 | 4.800 | 4.920 | 14 | 36 | 30 | 84 | 52 | 176 |
| AP1152ADU49 | 4.777 | 4.900 | 5.023 | 14 | 37 | 30 | 85 | 52 | 178 |
| AP1152ADU51 | 4.972 | 5.100 | 5.228 | 14 | 37 | 31 | 87 | 53 | 182 |
| AP1152ADU52 | 5.070 | 5.200 | 5.330 | 14 | 37 | 31 | 87 | 54 | 184 |
| AP1152ADU53 | 5.167 | 5.300 | 5.433 | 15 | 38 | 31 | 88 | 54 | 186 |
| AP1152ADU54 | 5.265 | 5.400 | 5.535 | 15 | 38 | 32 | 89 | 55 | 188 |
| AP1152ADU5E | 5.313 | 5.450 | 5.587 | 15 | 38 | 32 | 89 | 55 | 190 |
| AP1152ADU55 | 5.362 | 5.500 | 5.638 | 15 | 38 | 32 | 89 | 55 | 190 |
| AP1152ADU60 | 5.850 | 6.000 | 6.150 | 15 | 39 | 33 | 93 | 58 | 199 |
| AP1152ADU65 | 6.337 | 6.500 | 6.663 | 16 | 40 | 34 | 96 | 61 | 209 |
| AP1152ADU70 | 6.825 | 7.000 | 7.175 | 16 | 41 | 35 | 100 | 63 | 219 |
| AP1152ADU75 | 7.312 | 7.500 | 7.688 | 17 | 42 | 37 | 103 | 66 | 229 |
| AP1152ADU80 | 7.800 | 8.000 | 8.200 | 17 | 43 | 38 | 107 | 68 | 238 |
| AP1152ADU85 | 8.287 | 8.500 | 8.713 | 18 | 45 | 39 | 110 | 71 | 248 |
| AP1152ADU90 | 8.775 | 9.000 | 9.225 | 18 | 46 | 40 | 114 | 73 | 258 |
| AP1152ADU95 | 9.262 | 9.500 | 9.738 | 19 | 47 | 42 | 117 | 76 | 267 |

11. Description

11.1 Input / output capacitors

Linear regulators require input and output capacitors in order to maintain the regulator's loop stability. If a 0.1μF capacitor is connected to the output side, the IC provides stable operation at any voltage in the practical current region. However, increase the CL capacitance when using the IC in the low current region and low voltage. Otherwise, the IC oscillates. The equivalent series resistance (ESR) of the output capacitor must be in the stable operation area. However, it is recommended to use as large a value of capacitance as is practical. The output noise and the ripple noise decrease as the capacitance value increases. ESR values vary widely between ceramic and tantalum capacitors. However, tantalum capacitors are assumed to provide more ESR damping resistance, which provides greater circuit stability. This implies that a higher level of circuit stability can be obtained by using tantalum capacitors when compared to ceramic capacitors with similar values.

The recommended value : $C_{in}=C_L=0.22\mu F$ (MLCC) $I_{out} \geq 0.5mA$.

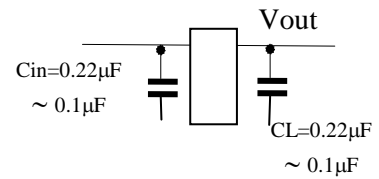

The input capacitor is necessary when the battery is discharged, the power supply impedance increases, or the line distance to the power supply is long.

This capacitor might be necessary on each individual IC even if two or more regulator ICs are used. Please confirm the stability while mounted. The IC provides stable operation with an output side capacitor of 0.1μF ($V_{out} \geq 2.5V$). If it is 0.1μF or more over the full range of temperature, either a ceramic capacitor or tantalum capacitor can be used without considering ESR. Please confirm stability while mounted.



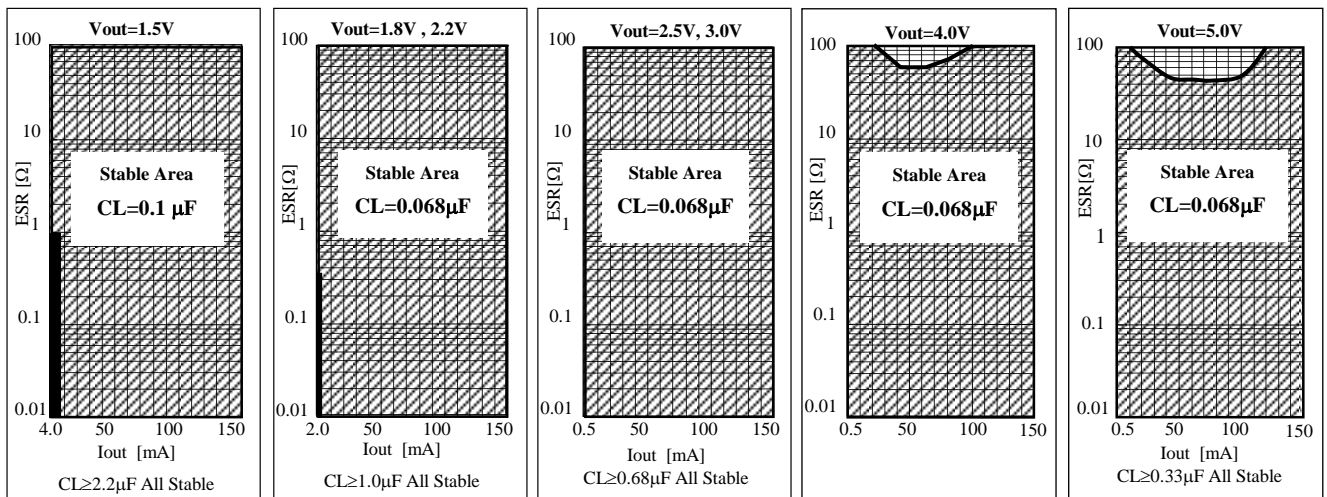


Figure 2. Output voltage, Output current vs. Stable Operation Area

The above graphs show stable operation with a ceramic capacitor of 0.1μF (excluding the low current region). If the capacitance is not increased in the low voltage, low current area, stable operation may not be achieved. Please select the best output capacitor according to the voltage and current used. The stability of the regulator improves if a big output side capacitor is used (the stable operation area extends.) Please use as large a capacitance as is practical. Although operation above 150 mA has not been described, stability is equal to or better than operation at 150 mA.





For evaluation Kyocera :CM05B104K10AB , CM05B224K10AB , CM105B104K16A , CM105B224K16A , CM21B225K10A
Murata :GRM36B104K10 , GRM42B104K10 , GRM39B104K25 , GRM39B224K10 , GRM39B105K6.3

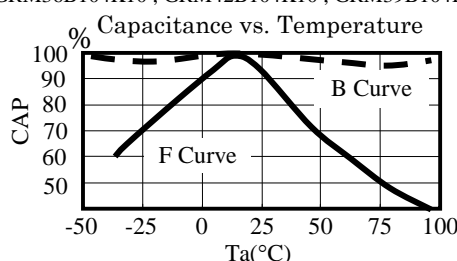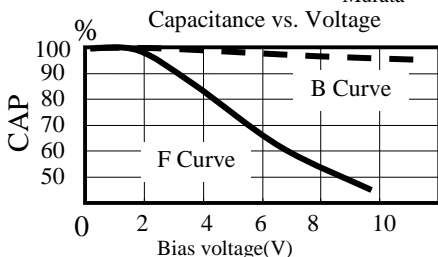


Generally, a ceramic capacitor has both a temperature characteristic and a voltage characteristic. Please consider both characteristics when selecting the part. The B curves are the recommend characteristics.

11.2 Output noise

AP1152ADU30 Cnp vs. Noise Iout=30mA BPF=400Hz ~ 80kHz

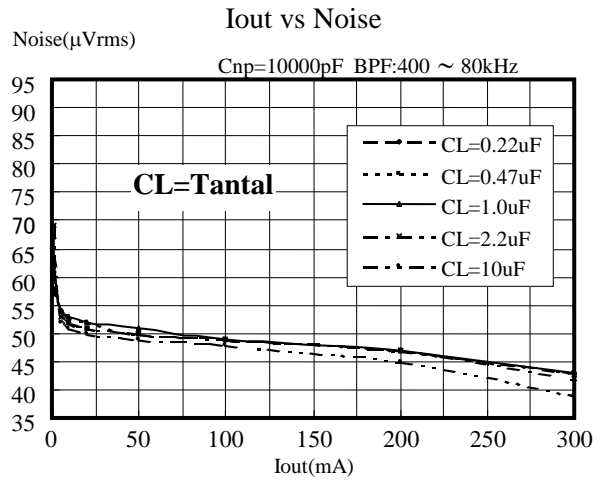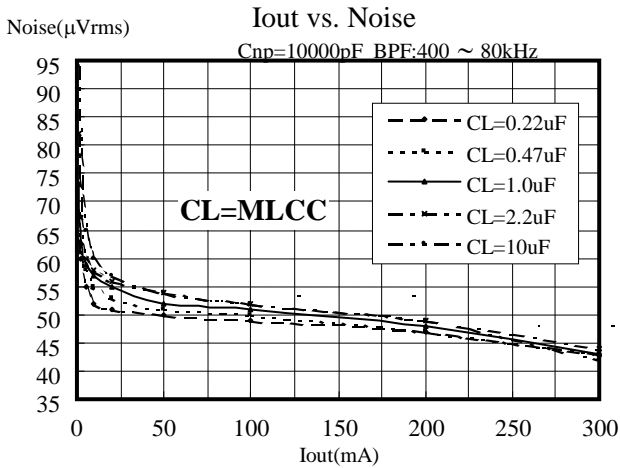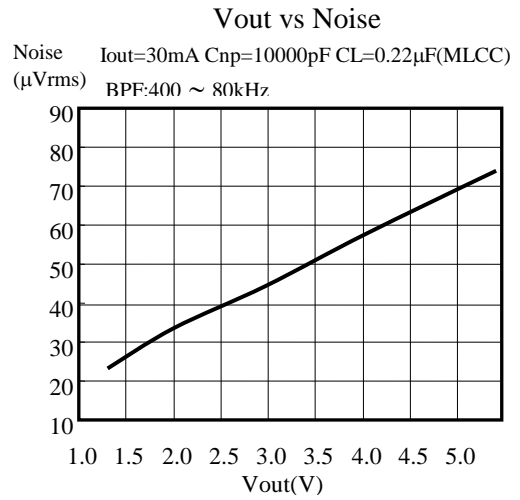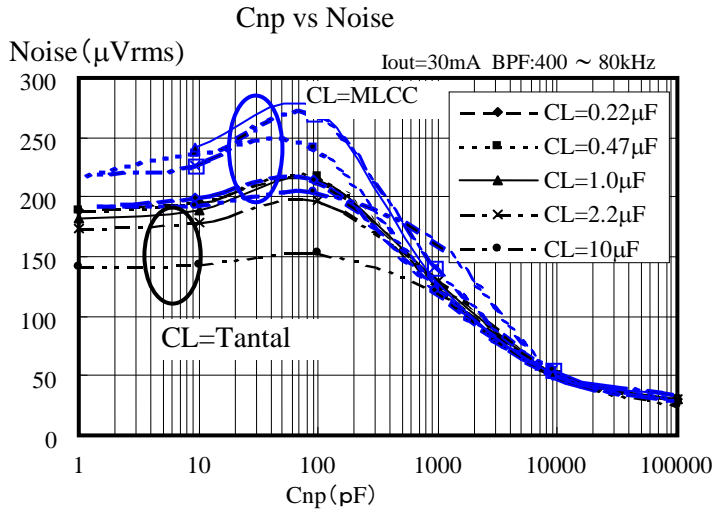


Increase Cnp to decrease the noise. The recommended Cnp capacitance is 6800pF(682) ~ 0.22µF(224). The amount of noise increases with the higher output voltages.




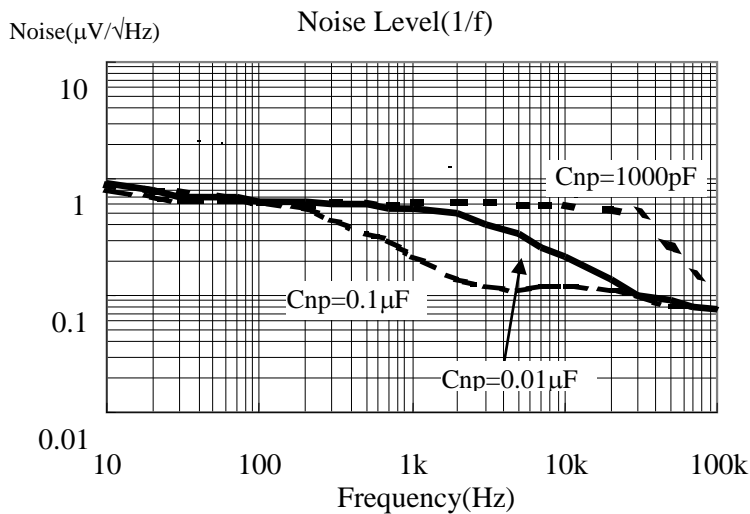


Cin=10µF Iout=10mA
 CL=0.22µF (Ceramic)



11.3 Ripple Rejection

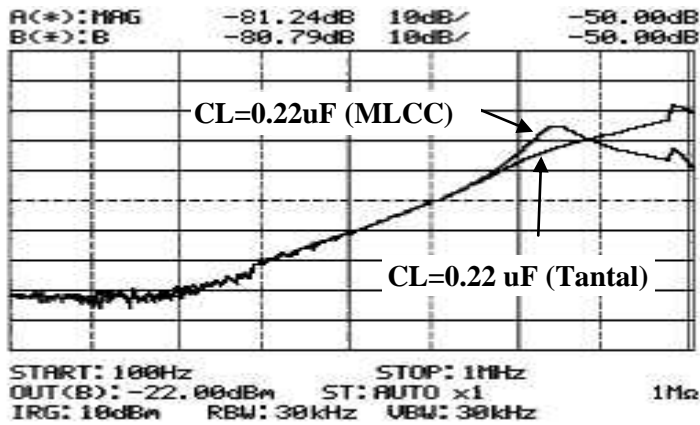

$V_{IN}=5.0V$ $V_{out}=3.0V$ $I_{out}=10mA$
 $V_R=500mV_{p-p}$ $f=100 \sim 1MHz$ $C_{np}=0.1\mu F$

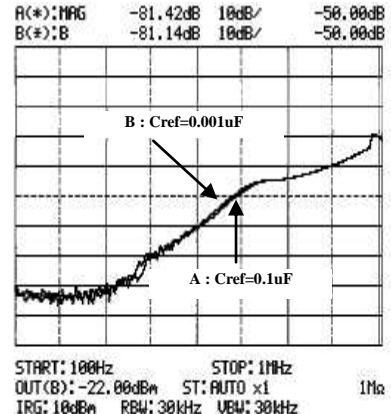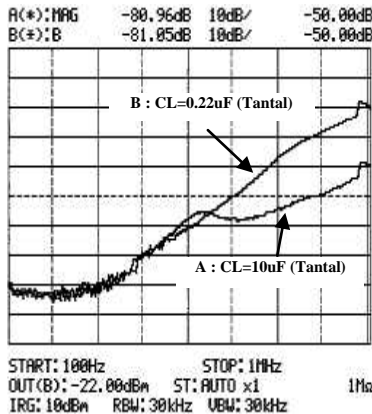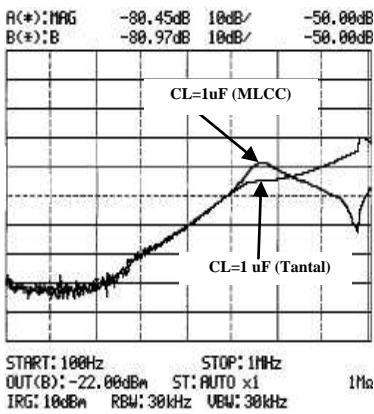


The ripple rejection characteristic depends on the characteristic and the capacitance value of the capacitor connected to the output side. The RR characteristic of 50KHz or more varies greatly with the capacitor on the output side and PCB pattern. If necessary, please confirm stability while operating.

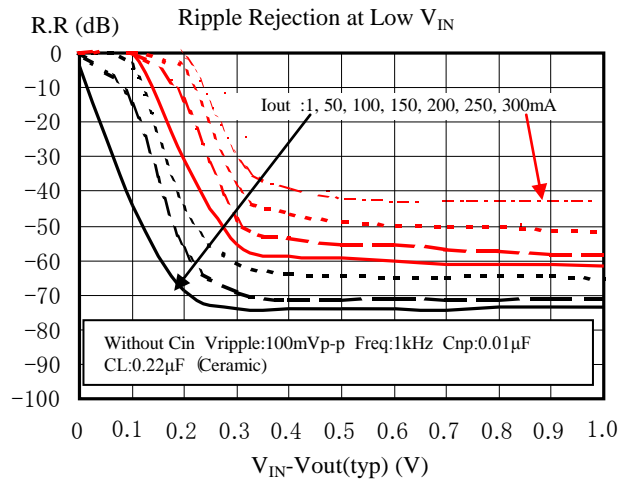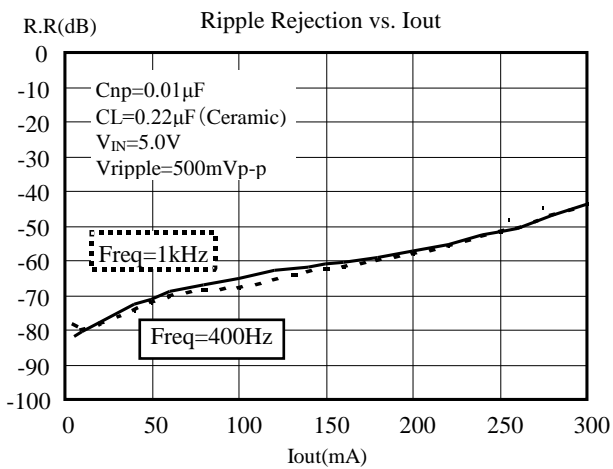


11.4 DC Characteristics


Line regulation

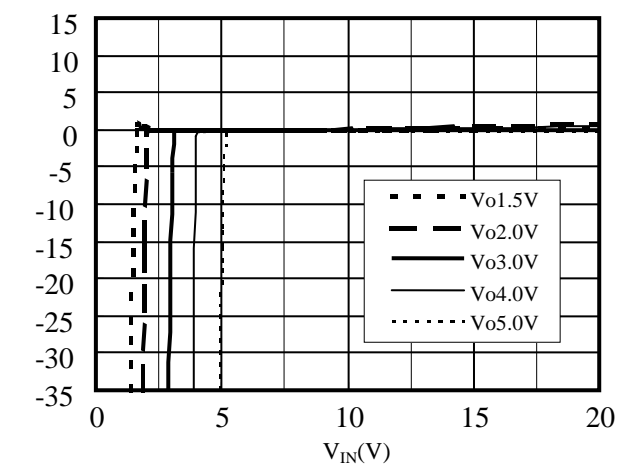


Load regulation

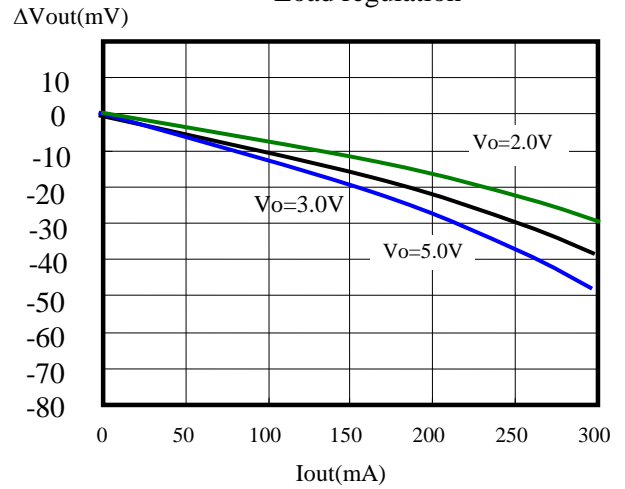


Regulation point





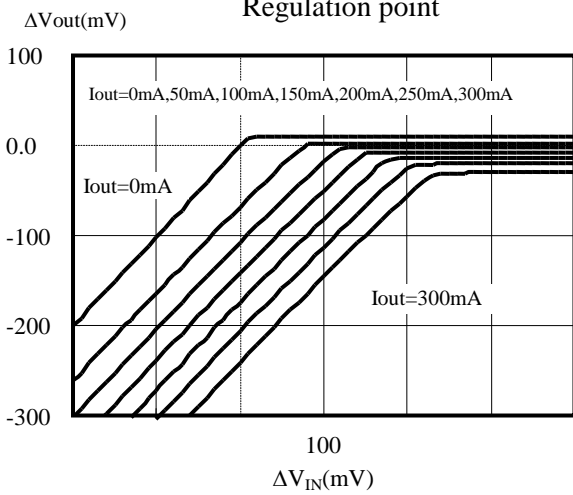


Vdrop






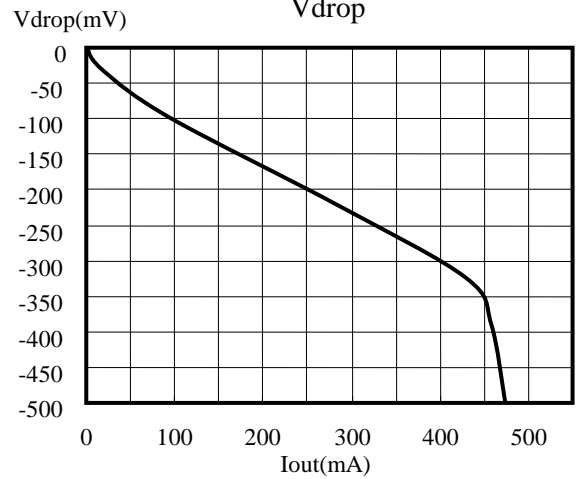


Vcont vs. Icont





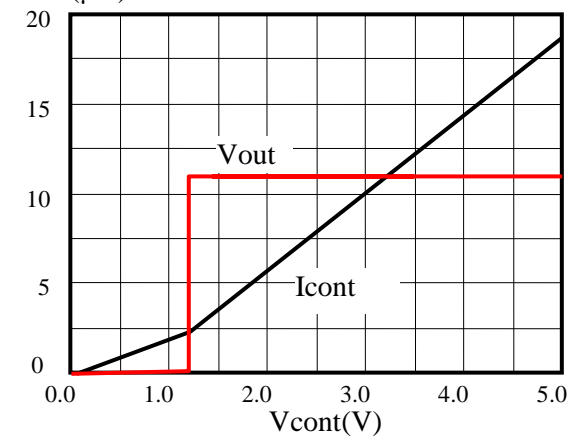


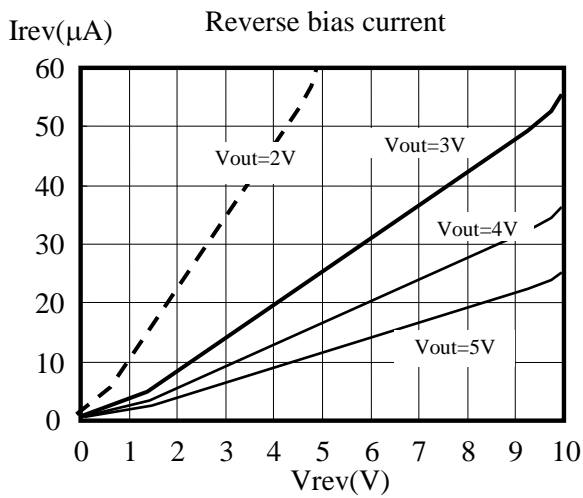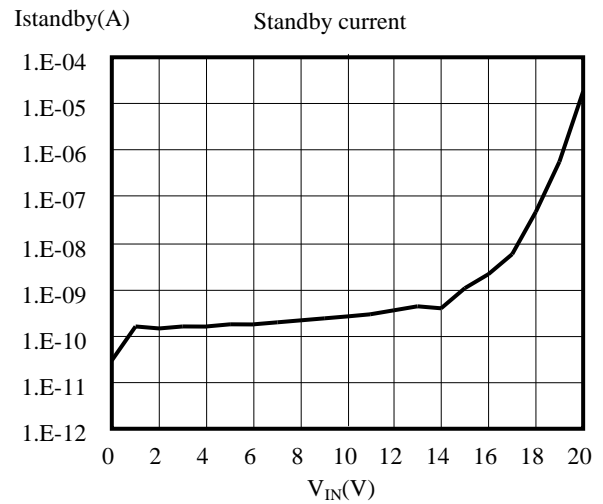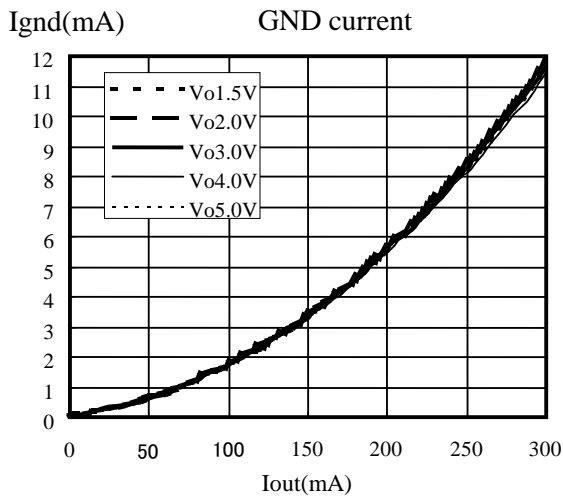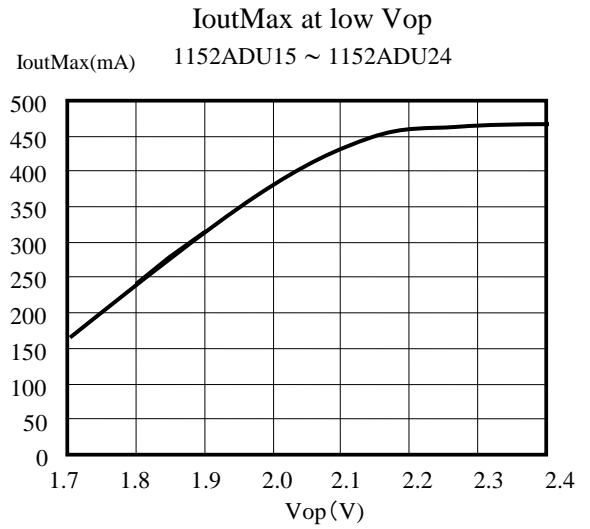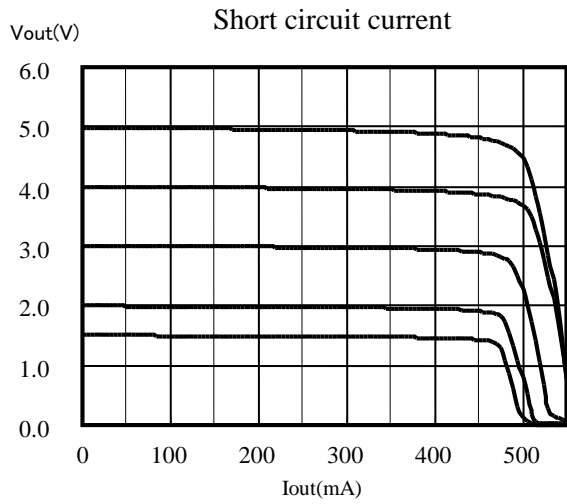

11.5 Temperature Characteristics

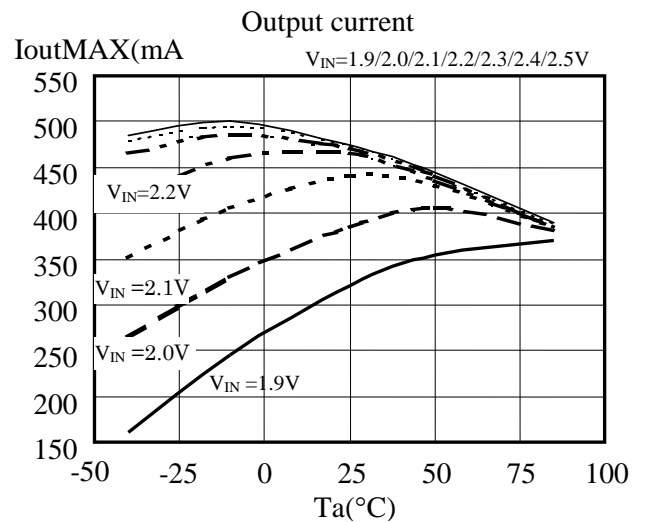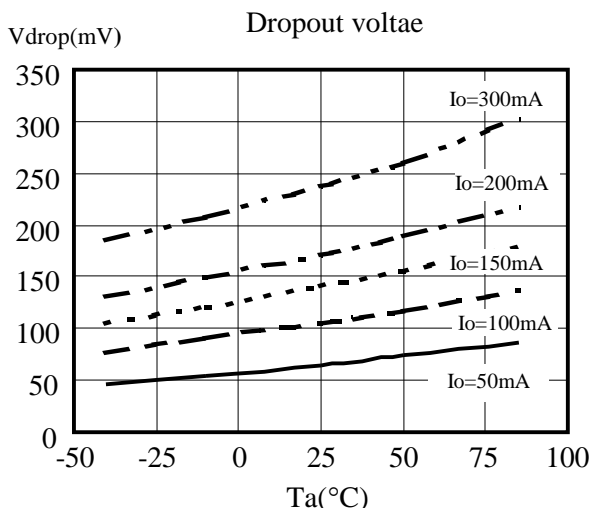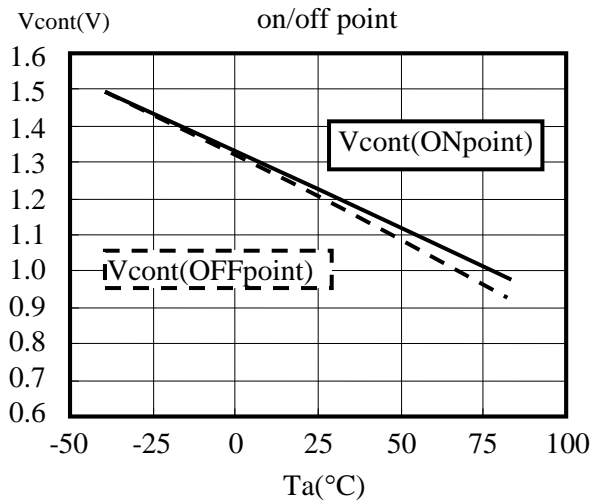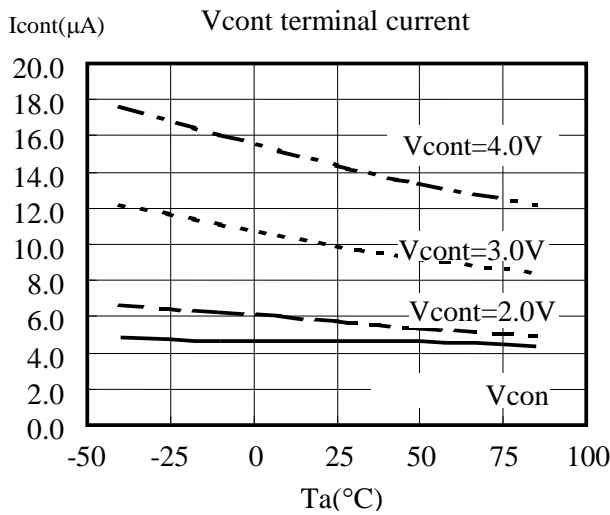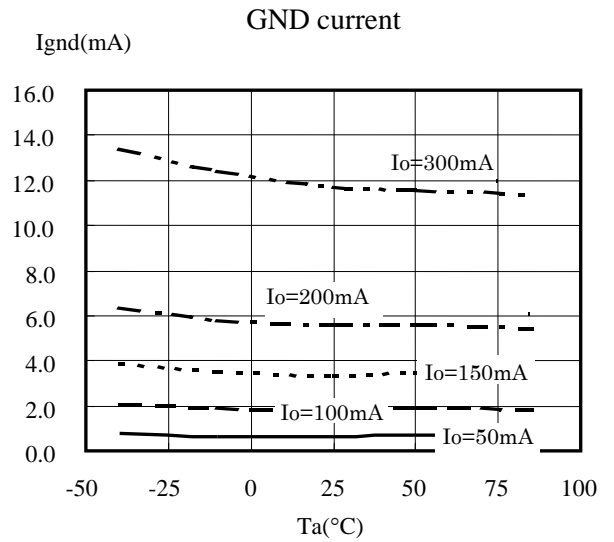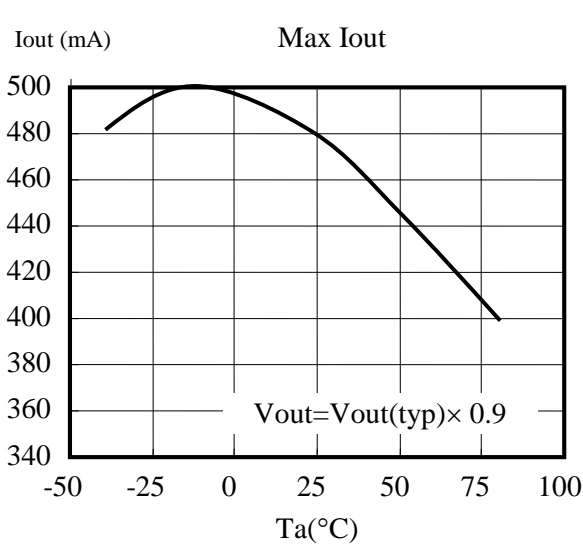


• Output voltage vs. Temperature characteristics

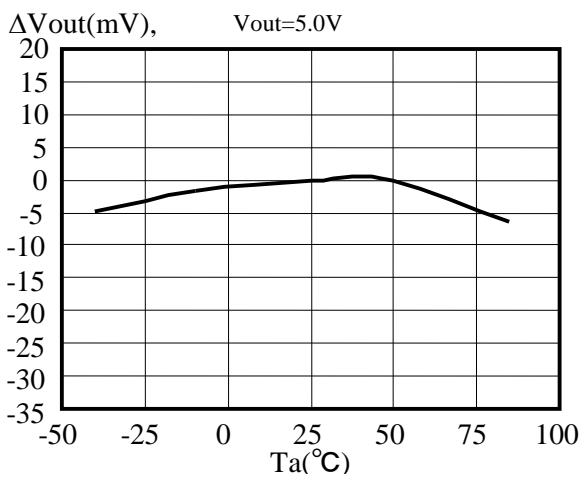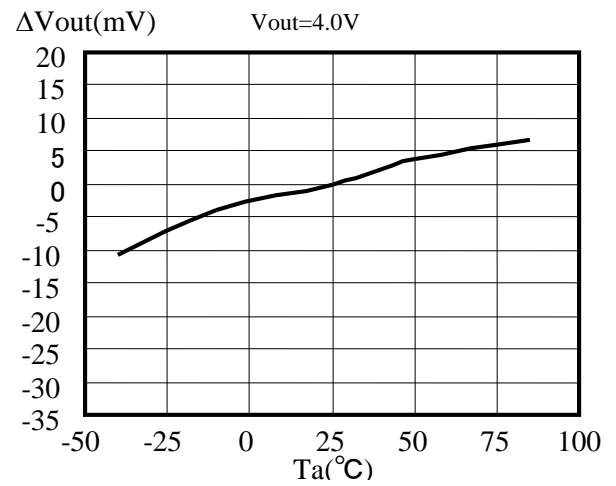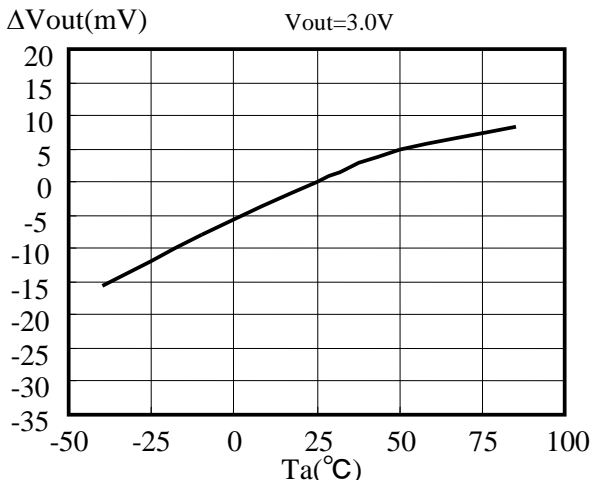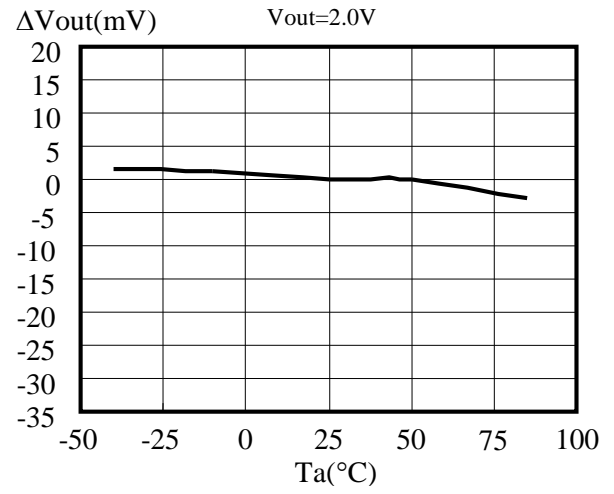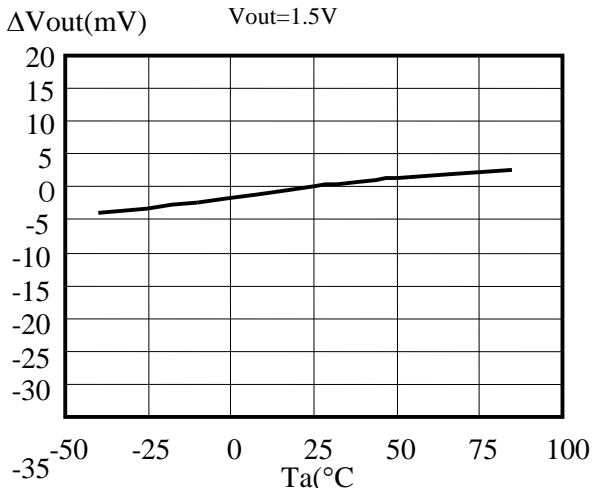



11.6 On/Off Control

It is recommended to turn the regulator Off when the circuit following the regulator is non-operating. A design with little electric power loss can be implemented. We recommend the use of the on/off control of the regulator without using a high side switch to provide an output from the regulator. A highly accurate output voltage with low voltage drop is obtained.

Because the V_{cont} terminal current is small, it is possible to control it directly by CMOS logic. The PULLDOWN resistance ($500k\Omega$) is built into the V_{cont} terminal. The noise and the ripple rejection characteristics depend on the capacitance on the V_{ref} terminal. The ripple rejection characteristic of the low frequency region improves by increasing the capacitance of C_{np} . A standard value is $C_{np}=0.068\mu F$. Increase C_{np} in a design with important output noise and ripple rejection requirements. The IC will not be damaged if the capacitor value is increased. The on/off switching speed changes depending on the N_p terminal capacitance. The switching speed slows when the capacitance is large.



11.7 PCB Layout

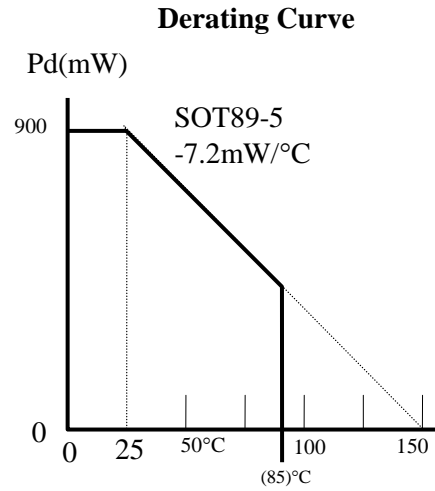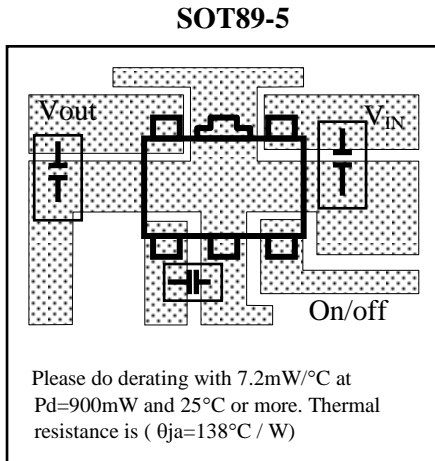

The package loss is limited at the temperature that the internal temperature sensor works (about 150°C). Therefore, the package loss is assumed to be an internal limitation. There is no heat radiation characteristic of the package unit assumed because of the small size. Heat is carried away by the device being installed on the PCB. This value changes by the material and the copper pattern etc. of the PCB. The losses are approximately 900mW(SOT89-5). Enduring these losses becomes possible in a lot of applications operating at 25°C.

Determining the thermal resistance when mounted on a PCB.


The operating chip junction temperature is shown by $T_j = \theta_{ja} \times P_d + T_a$. T_j of the IC is set to about 150°C. P_d is a value when the overtemperature sensor is made to work.

T_a ($T_a=25^\circ\text{C}$)
 $150 = \theta_{ja} \times p_d + 25$
 $\theta_{ja} \times P_d = 125$
 $\theta_{ja} = (125 / p_d) (\text{°C} / \text{mW})$

Pd is easily obtained.

Mount the IC on the PCB. P_d becomes $V_{IN} \times I_{in}$ when the output side of the IC is short-circuited. The input current decreases gradually by the temperature rise of the chip. Please use the value when the current is steady (thermal equilibrium is reached). In many cases, heat radiation is good, and P_d becomes 900 mW or more.

P_d is obtained by the normal temperature in degrees. The current that can be used at the highest operating temperature is obtained from the graph of the figure below.

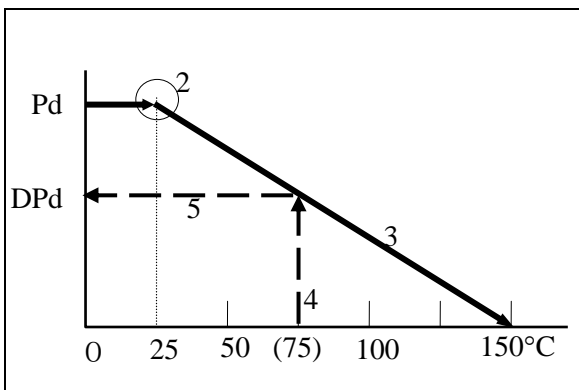

- Procedure (Do when PCB mounted).
1. P_d is obtained ($V_{IN} \times I_{in}$ when the output side is short-circuited).
 2. P_d is plotted on the horizontal line to 25°C.
 3. P_d is connected with the point of 150°C by the straight line (bold face line).
 4. A line is extended vertically above the point of use temperature in the design. For instance, 75°C is assumed (broken line).
 5. Extend the intersection of the derating curve (fat solid line) and (broken line) to the left and read the P_d value.

The maximum current that can be used at the highest operating temperature is:

$$I_{out} \cong DP_d \div (V_{IN(max)} - V_{out}).$$

12. Definition of term

- **Output Voltage (Vout)**

The output voltage is specified with $V_{IN}=(V_{out}(typ)+1V)$ and $I_{out}=5mA$.

- **Maximum Output Current (Iout MAX)**

The rated output current is specified under the condition where the output voltage drops 0.3V the value specified with $I_{out}=5mA$. The input voltage is set to $V_{out}(typ)+1V$ and the current is pulsed to minimize temperature effect.

- **Dropout Voltage (Vdrop)**

The dropout voltage is the difference between the input voltage and the output voltage at which point the regulator starts to fall out of regulation. Below this value, the output voltage will fall as the input voltage is reduced. It is dependent upon the load current and the junction temperature.

- **Line Regulation (LinReg)**

Line regulation is the ability of the regulator to maintain a constant output voltage as the input voltage changes. The line regulation is specified as the input voltage is changed from $V_{IN}=V_{out}(typ)+1V$ to $V_{IN}=V_{out}(typ)+6V$. It is a pulse measurement to minimize temperature effect.

- **Load Regulation (LoaReg)**

Load regulation is the ability of the regulator to maintain a constant output voltage as the load current changes. It is a pulsed measurement to minimize temperature effects with the input voltage set to $V_{IN}=V_{out}(typ)+1V$. The load regulation is specified output current step conditions of 5mA to 100mA.

- **Ripple Rejection (R.R)**

Ripple rejection is the ability of the regulator to attenuate the ripple content of the input voltage at the output. It is specified with $200mV_{rms}$, 1kHz super-imposed on the input voltage, where $V_{IN}=V_{out}+1.5V$. Ripple rejection is the ratio of the ripple content of the output vs. input and is expressed in dB.

- **Standby Current (Istandby)**

Standby current is the current, which flows into the regulator when the output is turned off by the control function ($V_{cont}=0V$).

- **Over Current Sensor**

The over current sensor protects the device when there is excessive output current. It also protects the device if the output is accidentally connected to ground.


- **Thermal Sensor**

The thermal sensor protects the device in case the junction temperature exceeds the safe value ($T_J=150^{\circ}C$). This temperature rise can be caused by external heat, excessive power dissipation caused by large input to output voltage drops, or excessive output current. The regulator will shut off when the temperature exceeds the safe value. As the junction temperatures decrease, the regulator will begin to operate again. Under sustained fault conditions, the regulator output will oscillate as the device turns off then resets. Damage may occur to the device under extreme fault.

Please reduce the loss of the regulator when this protection operate, by reducing the input voltage or make better heat efficiency. In the case that the power, $V_{IN} \times I_{short}$ (Short Circuit Current), becomes more than twice of the maximum rating of its power dissipation in a moment, there is a possibility that the IC is destroyed before internal thermal protection works.

- **Reverse Voltage Protection**

Reverse voltage protection prevents damage due to the output voltage being higher than the input voltage. This fault condition can occur when the output capacitor remains charged and the input is reduced to zero, or when an external voltage higher than the input voltage is applied to the output side



13. Recommended External Circuits

■ External Circuit

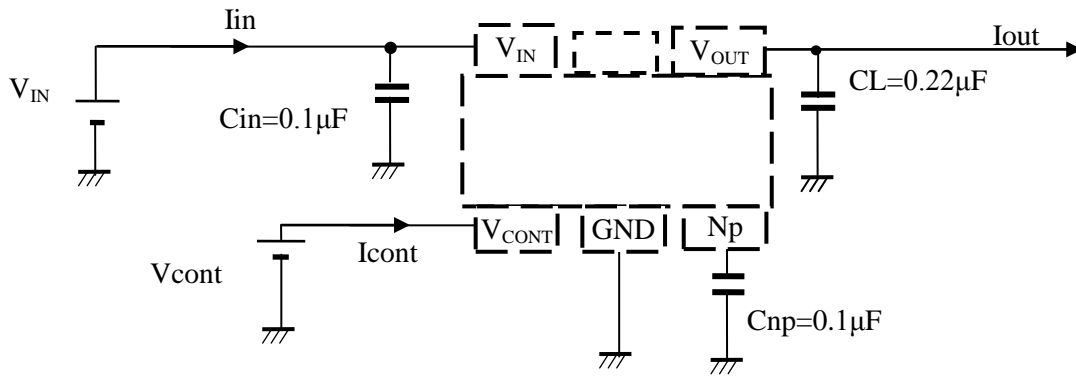


Figure 3. External Circuit (the case of $CL=0.22\mu F$)

15. Revise History

| Date (YY/MM/DD) | Revision | Page | Contents |
|--------------------|----------|------|--|
| 14/10/29 | 00 | - | First Edition |
| 14/12/05 | 01 | 24 | Changed horizontal width dimension tolerance of the package ; 4.5±0.2 to 4.5±0.1 Changed vertical width dimension tolerance of the package ; 2.5±0.2 to 2.5±0.1(without pin length) Changed vertical width dimension tolerance of the package ; 4.5+0.5/-0.3 to 4.3+0.15/-0.15 (with pin length) Changed height dimension tolerance of the package ; 1.5±0.2 to 1.5±0.1 Changed pin length ; 1.0→0.9 Add General tolerance : ±0.2 |

IMPORTANT NOTICE

0. Asahi Kasei Microdevices Corporation (“AKM”) reserves the right to make changes to the information contained in this document without notice. When you consider any use or application of AKM product stipulated in this document (“Product”), please make inquiries the sales office of AKM or authorized distributors as to current status of the Products.
1. All information included in this document are provided only to illustrate the operation and application examples of AKM Products. AKM neither makes warranties or representations with respect to the accuracy or completeness of the information contained in this document nor grants any license to any intellectual property rights or any other rights of AKM or any third party with respect to the information in this document. You are fully responsible for use of such information contained in this document in your product design or applications. **AKM ASSUMES NO LIABILITY FOR ANY LOSSES INCURRED BY YOU OR THIRD PARTIES ARISING FROM THE USE OF SUCH INFORMATION IN YOUR PRODUCT DESIGN OR APPLICATIONS.**
2. The Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact, including but not limited to, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for the above use unless specifically agreed by AKM in writing.
3. Though AKM works continually to improve the Product’s quality and reliability, you are responsible for complying with safety standards and for providing adequate designs and safeguards for your hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of the Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption.
4. Do not use or otherwise make available the Product or related technology or any information contained in this document for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). When exporting the Products or related technology or any information contained in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. The Products and related technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
5. Please contact AKM sales representative for details as to environmental matters such as the RoHS compatibility of the Product. Please use the Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. AKM assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.
6. Resale of the Product with provisions different from the statement and/or technical features set forth in this document shall immediately void any warranty granted by AKM for the Product and shall not create or extend in any manner whatsoever, any liability of AKM.
7. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of AKM.