LOADING PATTERN MATING SIDE

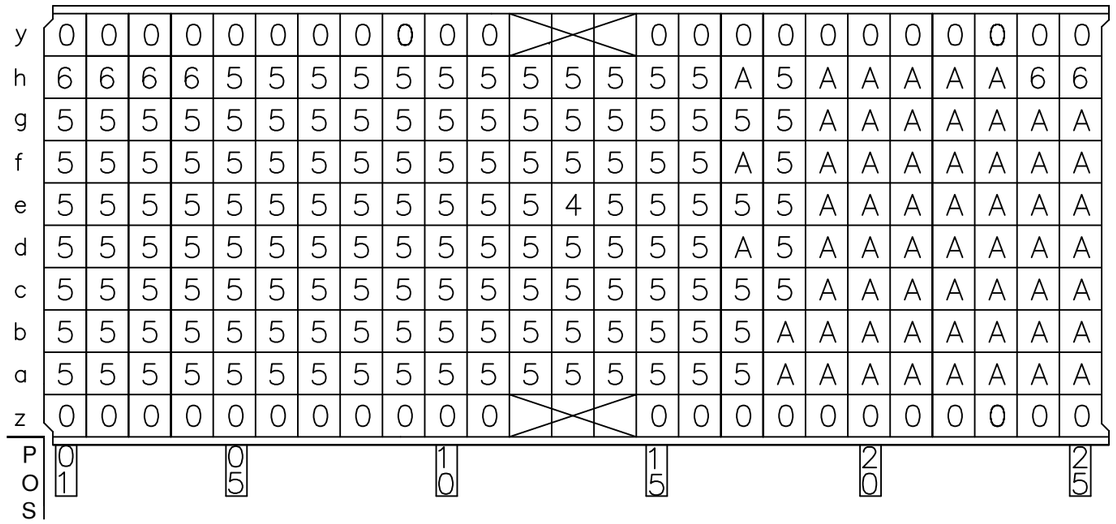

LOADED CONNECTOR ASSEMBLY
(FOR EXAMPLE)

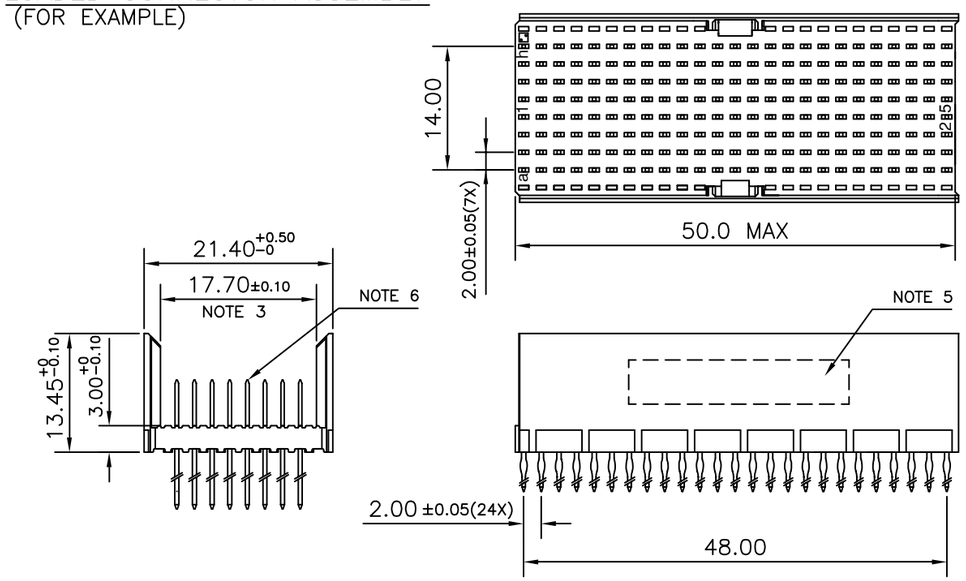

CONTACT OVERVIEW

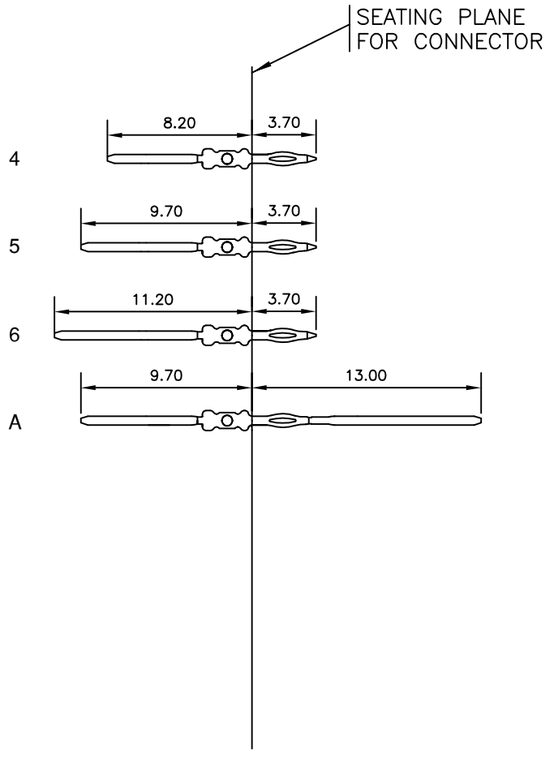

LAY–OUT P.C.B.–HOLE

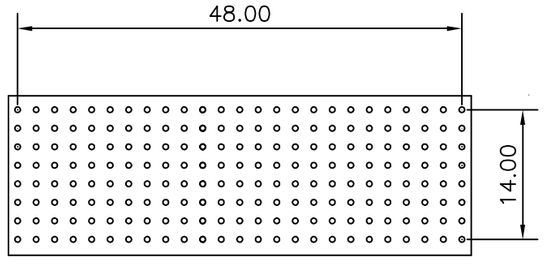

HM2P95PKJ1F0

LEAD FREE INDICATOR : LF = LEAD FREE
(DIGIT 15 & 16)

PLATING CODE (DIGIT 13 AND 14)
(REF DRW NO. BS,C , 201844 , 003)

NOTES

1. THIS PRODUCT IS CSA APPROVED.
2. THIS PRODUCT IS UL RECOGNIZED.
3. MEASURED AT THE BOTTOM.
4. MATERIAL CONTACT: PHOSPHORBRONZE
   HOUSING: CREAM WHITE GLASS FILLED POLYESTER UL-94V0
5. CONNECTOR PRINTED WITH P/N AND DATE CODE.
6. FOR ACTUAL CONTACT LOADINGS, SEE LOADING PATTERN MATING SIDE.
7. SHAPE OF CONNECTOR HOUSING CAN ALTER DEPENDING ON PRODUCTION LOCATION
8. THE PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
9. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BS, A , 201572 , 001

PART NO: HM2P95PKJ1F0----

ltr	ecn no	dr	date
A	I06-0195	MINI	2006-11-01

dr	MINI K VANDANATH	2006-11-01
engr	BIJU K PAUL	2006-11-01
chr	BIJU K PAUL	2006-11-01
appd	BIJU K PAUL	2006-11-01

mat'l. code	SEE NOTE 4
surface	ISO 1302
tolerance	ISO 406 ISO 1101
tolerances unless otherwise specified	
angles	0°±1°
linear	.0±0.2 / .00±0.1
projection	
MM	
scale	–
product family	MILLIPACS
title	MPACS 8+2R STR HDR PF CONN TYPE DE
dwg no	BS, C ,203028, 734
sheet 1 of 1	
size	A3
type	Product Customer Drawing
sheet index	revision A / sheet 1

FCIconnect.com
Copyright FCI

form: A3

PDM: Rev:A STATUS:Released Printed: Dec 04, 2007